


# USB Micro Strong

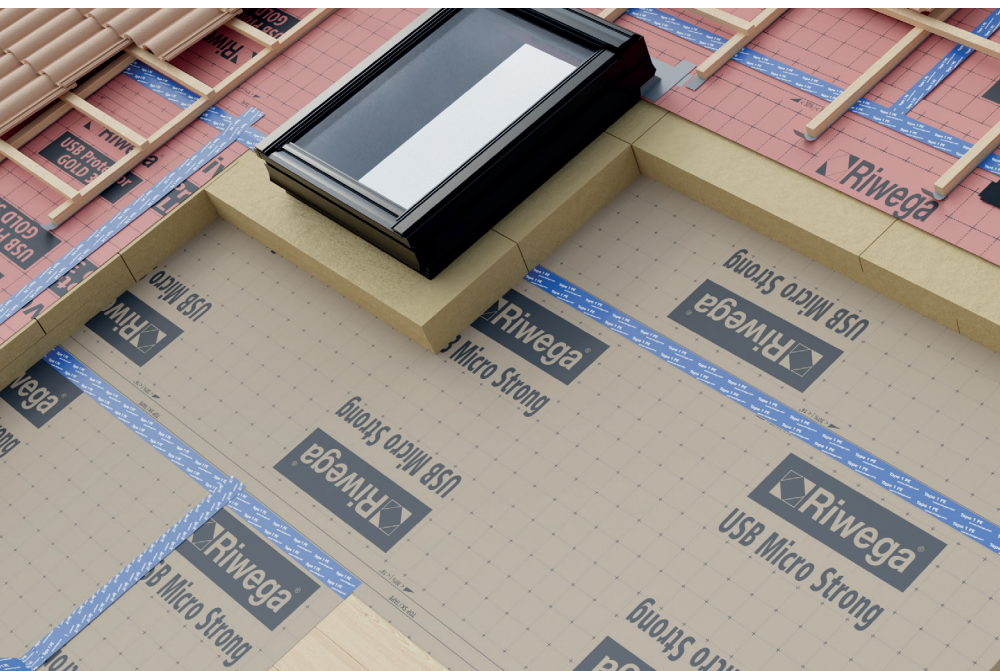

## QUICK OVERVIEW: STRENGTHS


### Top mechanical resistance

- Vapour control layer
- High tearing resistance
- Top abrasion resistance also when the product is laid on rough surfaces
- Regulates the vapour flow
- Ideal as a temporary waterproofing system during the different working phases on the working site

### Features:



### Classification:



### Technical data sheet

Material	PP.PP.PP	
Film	PP	
Colour	Beige	
Mass per unit area	EN 1849-2	230 g/m <sup>2</sup>
Thickness		1,06 mm
Sd value	EN ISO 12572	>2 m
Water vapour permeability	EN ISO 12572	~ 15 g/m <sup>2</sup> /24 h
Water column	EN 20811	>900 cm
Water tightness	EN 13984	passed
Tensile strength MD/CD*	EN 12311-1	380 / 300 N/50mm
Elongation MD/CD*	EN 12311-1	50 / 65 %
Tear resistance MD/CD*	EN 12310-1	300 / 390 N
Fire reaction class	EN 13501-1	E
VOC class	ISO 16000	A+
UV stability		4 months
Temperature resistance		-40°/+100°C

\*MD = longitudinal CD = transversal  
Riwega Srl is not responsible for negligent and improper use of its products



### Composition:

- Protective UV stabilized, water repellent layer in PP ①
- Functional film in PP ②
- Protective layer in PP ③

### Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m <sup>2</sup> )
02030195	02020191	1,5	50	1500