


# Sil Power Fix

32

R3

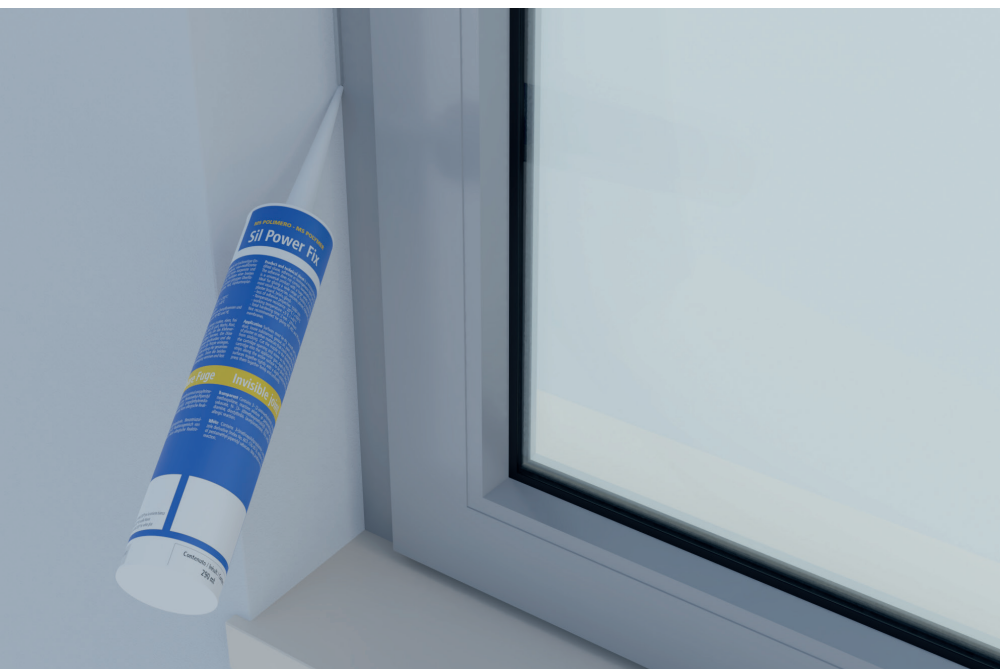

## QUICK OVERVIEW: STRENGTHS

### The elastic sealant, durable and invisible

- Ms Polymer sealant
- Ideal for air- and windtight sealing of any interruptions of the building envelope
- Completely invisible and flexible joint; internal and external use
- Particularly resistant to expansions and vibrations

#### Features:



#### Classification:



Technical data sheet			
Material	MS polimero		
Colour	Colourless	White	
Density	~1,05 g/cm <sup>3</sup>	~1,4 g/cm <sup>3</sup>	
Output	30 ml/m		
Hardness (Shore A)	~22	~25	
Max. joint deformation	±25 %		
Elongation at break	npd*	250 %	
Overpaintable	on complete hardening		
Formation of skin (23°C/50% UR)	~10 min.	~60 min.	
Drying (23°C/50% UR)	~2 mm/24 h		
Emissions	EMICODE®	-	E1 <sup>PLUS</sup>
Working temperature	+5°C / +40°C		
Operating temperature	-20°C / +100°C		
Fire class	EN 13501-1	E	
Classification facade elements	EN 15651-1	F-INT	25LM
Classification bathroom plumbings	EN 15651-3	npd*	XS1
Classification walkways	EN 15651-4	npd*	25LM
Storage place	dry, protected from UV rays, +5°C / +25°C		
Storage period	max. 12 months		



#### Codes and measures

Version	Code	Content (ml)	Box (pc)	Pallet (box)
Colourless	02040408	290	20	60
White	02040409	290	20	60

\*no performance determined

Riwega Srl is not responsible for negligent and improper use of its products