


Micro Vario NET V20

QUICK OVERVIEW: STRENGTHS

Better performance due to variable hygrometry

- Vapour control layer with variable hygrometric
- High tear strength due to built-in reinforcement fabric
- Semi-transparent, for easy installation on timber frame constructions
- Ideal for blown-in insulation with loose thermal insulation
- Perfect regulation of vapour transmission in terms of temperature and humidity

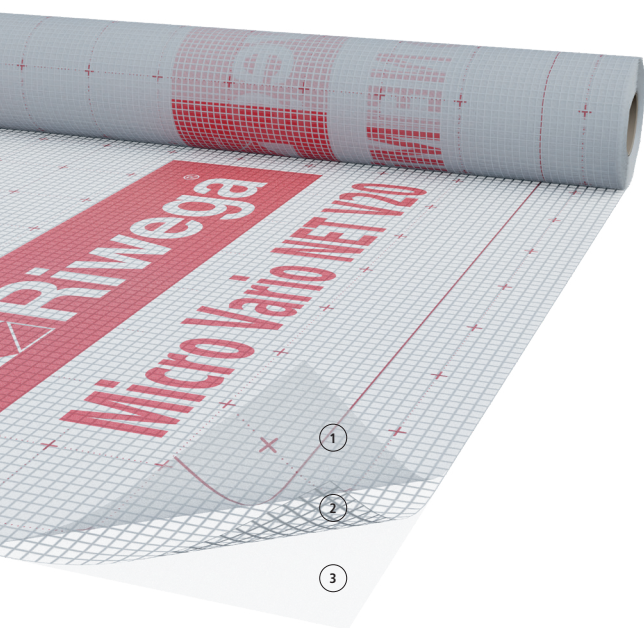

Composition:

- 1 Functional film in PA
- 2 PET reinforcement mesh
- 3 PP non-woven fabric

Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m ²)
02030146	-	1,5	50	1500

Features:



Classification:



Technical data sheet

Material	Reinforced PA.PP	
Film	PA	
Colour	Semi-transparent white	
Mass per unit area	EN 1849-2	115 g/m ²
Thickness		0,35 mm
Sd value	EN ISO 12572	0,2 - 25 m
Water vapour permeability	EN ISO 12572	~ 100 - 1 g/m ² /24 h
Water column	EN 20811	-
Water tightness	EN 13984	passed
Tensile strength MD/CD*	EN 12311-1	200 / 200 N/50mm
Elongation MD/CD*	EN 12311-1	10 / 10 %
Tear resistance MD/CD*	EN 12310-1	150 / 150 N
Fire reaction class	EN 13501-1	E
UV stability		-
Temperature resistance		-40°/+80°C

*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products