


# DB 200

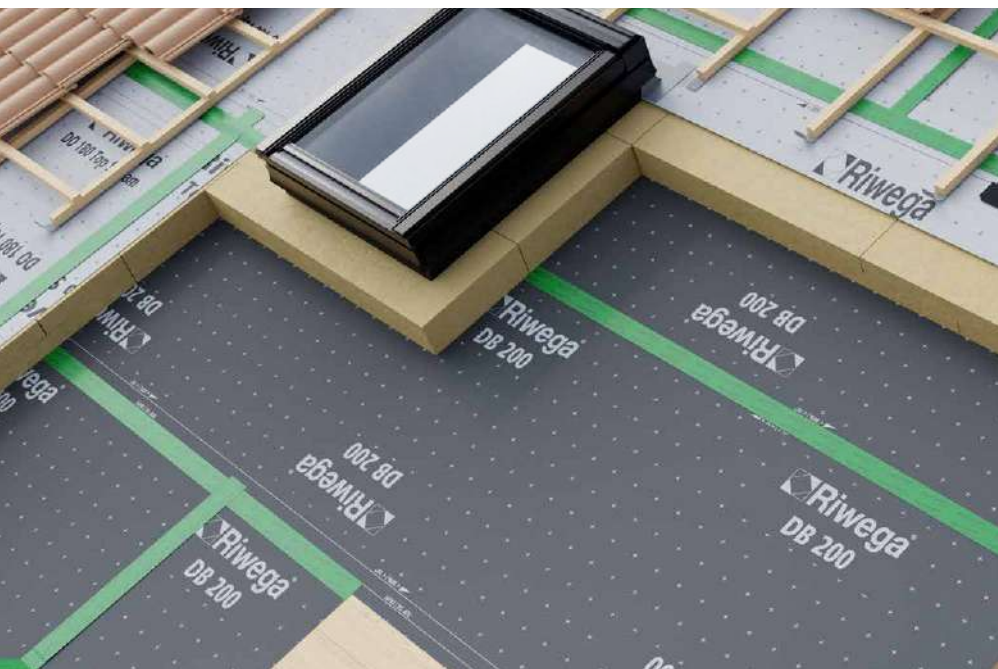

40  
R2

## QUICK OVERVIEW: STRENGTHS


### Easy and effective choice with high grammage

- Vapour control layer
- High tearing resistance
- Regulates the vapour flow
- Ideal as a temporary waterproofing system during the different working phases on the working site

### Features:



### Classification:

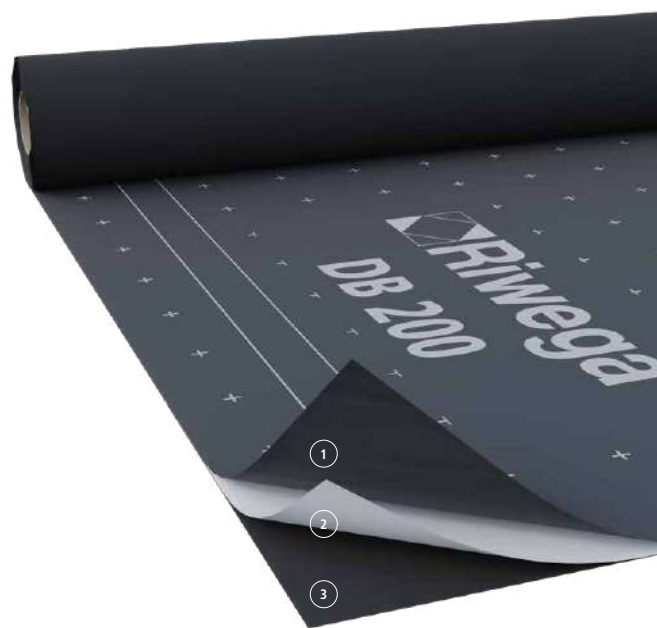

Technical data sheet		
Mass per unit area	EN 1849-2	200 g/m <sup>2</sup>
Thickness		0,80 mm
Sd value	EN ISO 12572	6 m
Water vapour permeability	EN ISO 12572	~ 3 g/m <sup>2</sup> /24 h
Water column	EN 20811	>200 cm
Water tightness	EN 1928 (Met. A)	passed
Tensile strength MD/CD*	EN 12311-1	480 / 330 N/50mm
Elongation MD/CD*	EN 12311-1	75 / 120 %
Tear resistance MD/CD*	EN 12310-1	260 / 360 N
Fire reaction class	EN 13501-1	E
UV stability		3 months
Temperature resistance		-40°/+90°C

### Composition:

- Protective UV stabilized, water repellent layer in PP ①
- Functional film in PP, watertight and lightly breathable ②
- Protective layer in PP ③

Codes and measures				
Code	Code TOP SK	Width (m)	Length (m)	Pallet (m <sup>2</sup> )
02030200	-	1,5	50	1500

\*MD = longitudinal CD = transversal  
Riwega Srl is not responsible for negligent and improper use of its products