


Pre-welded custom membranes

07
R2





QUICK OVERVIEW: STRENGTHS

The "pre-welded" model for quick installation

- Highly breathable, watertight membrane
- Pre-welded over the entire roof pitch
- Easier and faster installation
- Safety by homogeneous welding
- Pre-packaged format up to size 20 x 20 m per piece
- No waste on site

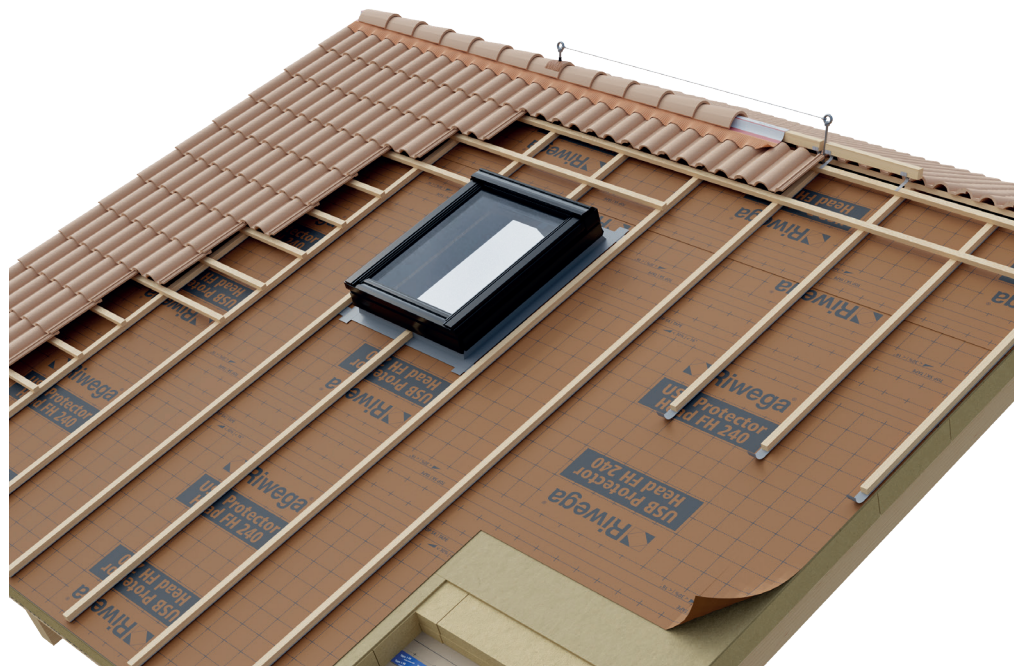

Design examples

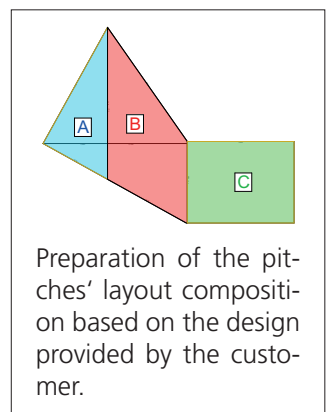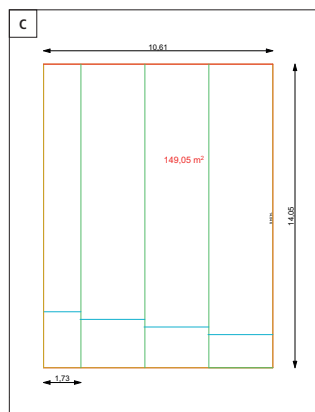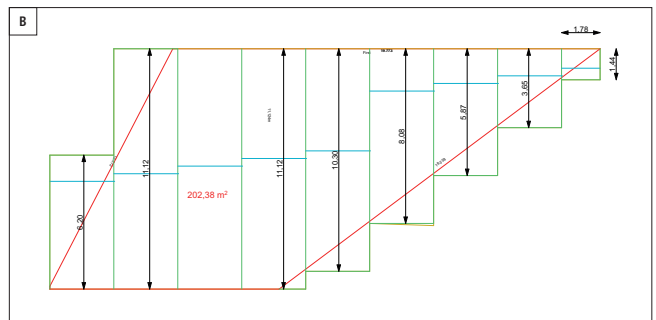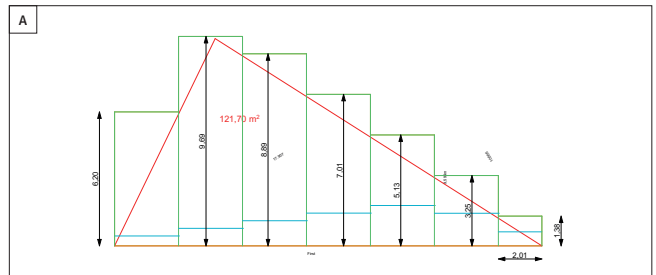

Codes and measures

Version	Code TOP SK	Width (m)	Length (m)	Surface (m²)
Head FH 330 VK	02050212	max. 20	max. 20	max. 400
Head FH 240 VK	02050211	max. 20	max. 20	max. 400

Pre-welded custom membranes



Place the pallet containing the folded membrane on top of the pitch to be covered



Unfold the membrane starting vertically and attach the first counter-batten to the edge of the pitch




After securing the counter-batten on the edge, unfold the membrane by proceeding horizontally



Cut the membrane and seal it around the parts emerging from the roof pitch using the appropriate accessories



After laying the membrane on the roof pitch without folds, secure it with a second counter-batten

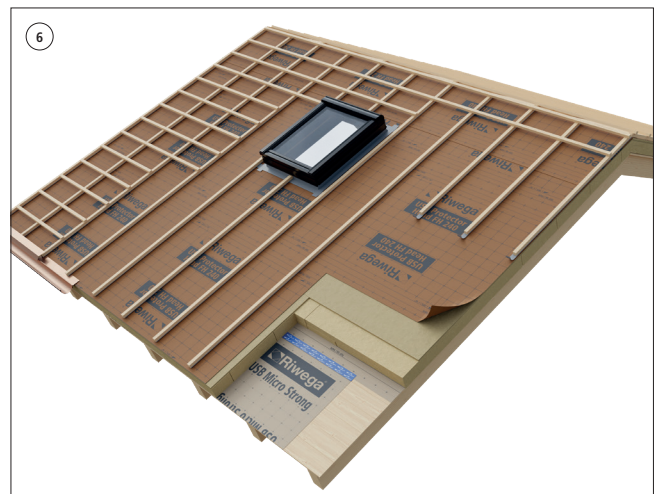

Finally, proceed with the placement of the remaining counter-battens and roof tile holder slats