


# USB Elefant 250

08

R2

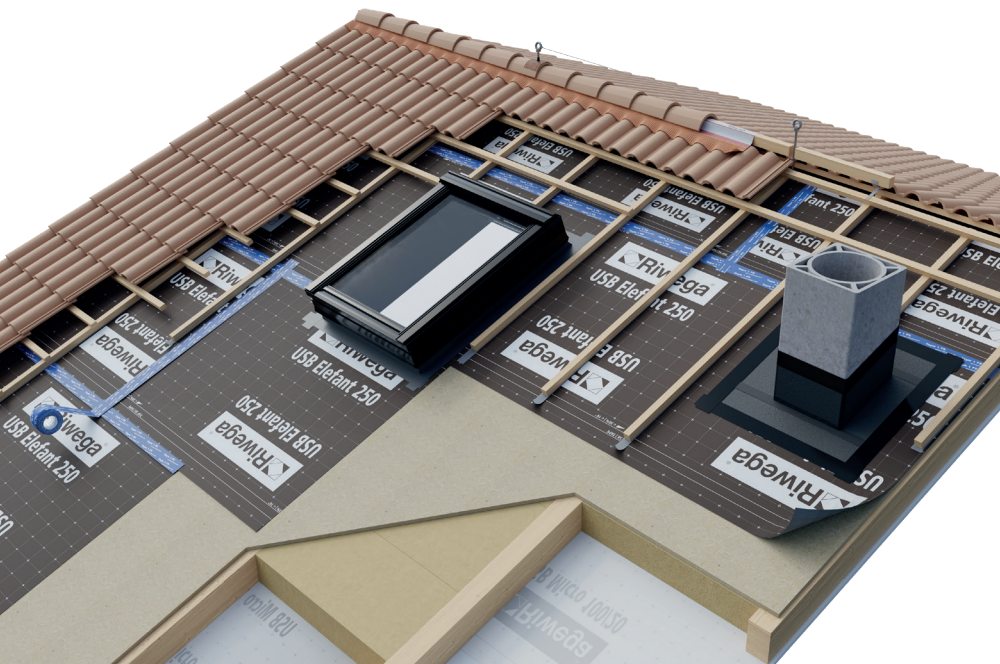

## QUICK OVERVIEW: STRENGTHS

### Thick, rough and resistant

- Highly breathable, water-tight membrane
- Optimized performance, guaranteed for 20 years thanks to the UV10 Bikom film
- Perfect for watertight wooden roofs and other types
- Rough surface compatible with mortar or foam

new product

### Features:



### Classification:



### Technical data sheet

Mass per unit area	EN 1849-2	250 g/m <sup>2</sup>
Thickness		1,10 mm
Sd value	EN ISO 12572	0,07 m
Water vapour permeability	EN ISO 12572	~ 500 g/m <sup>2</sup> /24 h
Watern column	EN 20811	>800 cm
Heavy rain test	TU Berlin	**npd
Resistance to water passage	EN 1928 (Met. A)	W1
Tensile strength MD/CD*	EN 12311-1	440 / 330 N/50mm
Elongation MD/CD*	EN 12311-1	50 / 60 %
Tear resistance MD/CD*	EN 12310-1	330 / 360 N
Fire reaction class	EN 13501-1	E
UV stability		6 months
Temperature resistance		-40°/+100°C

### Composition:

- Protective UV stabilized, water repellent layer in PP ①
- Film UV10 Bikom, monolithic, elastic ②
- Protective layer in PP ③

### Codes and measures

Code	Code TOP SK	Width (m)	Length (m)	Pallet (m <sup>2</sup> )
02050150	02020233	1,5	40	1200
020501500	020202330	3,0	30	1800

\*\*no performance determined

\*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products