



Coll 50 - 80 - 150 - 150 X

14
R3

QUICK OVERVIEW: STRENGTHS

Precision sealing

- Monoadhesive butyl band
- The pre-cut liner makes it ideal for all linear and corner seals
- Characterized by butyl glue with a high seal and without solvents, suitable for every laying surface.
- Dual use, indoor and outdoor, thanks to the water-resistant surface

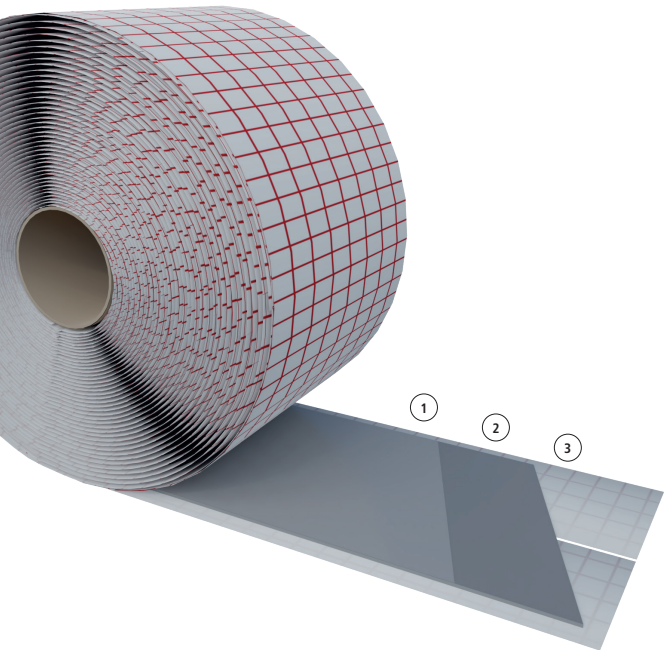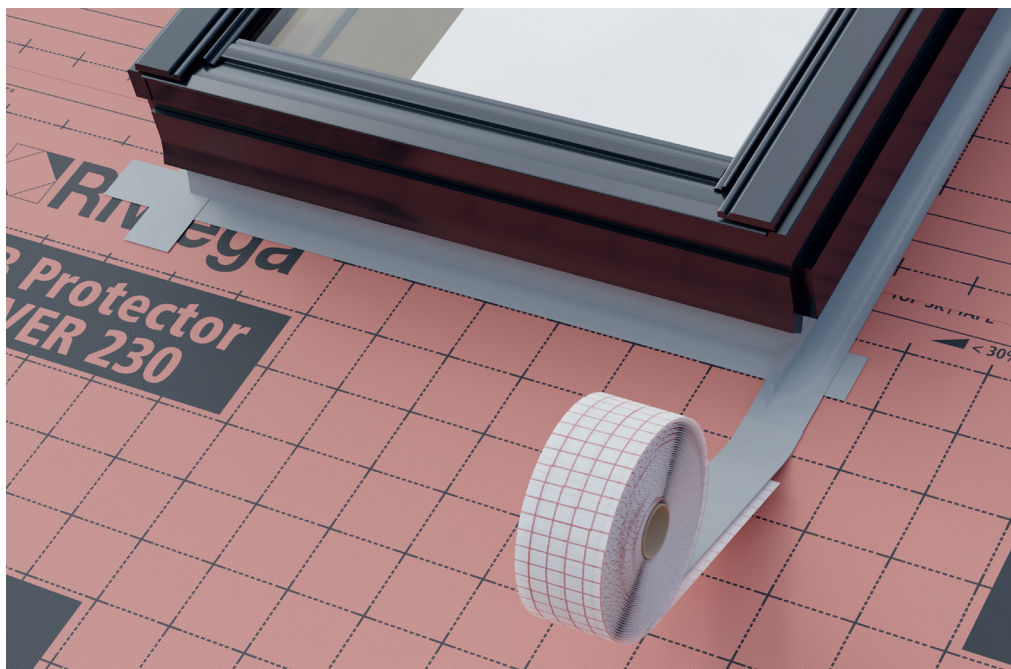

Composition:

- 1 PE film
- 2 Butylic glue
- 3 Pre-cutted silicone liner in 150 and 150 X versions

Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Coll 50	02044050	50x15	12	30
Coll 80	02044080	80x15	4	30
Coll 150	02044150	150x15	4	30
Coll 150 X	02044151	150x15	2	30

Features:



Technical data sheet

Glue		butyl
Glue carrier material		LDPE
Protection liner		YES (pre-cutted in 150 and 150 X versions)
Thickness Coll 50 - 150		1,0 mm
Thickness Coll 80 - 150 X		2,0 mm
Specific weight	DIN EN ISO 1183-1	~1,4 g/cm ³
Viscosity	DIN EN ISO 7390	stable
Hardness (Shore 00)	DIN EN ISO 868	~40
Compressive strength	DTU 39.4	>0,04 N/mm ²
Solid content	DIN EN ISO 10563	>99 %
Emissions	EMICODE®	very low
Working temperature		+5°C / +30°C
Temperature resistance		-40°C / +100°C
Fire class	DIN 4102	B2
UV stability		3 months*
Storage place		dry, protected from UV rays, ~20°C
Storage period		max. 12 months

*with reference to the Central European climate
Riwega Srl is not responsible for negligent and improper use of its products