


# Coll Fire B 75

15

R3

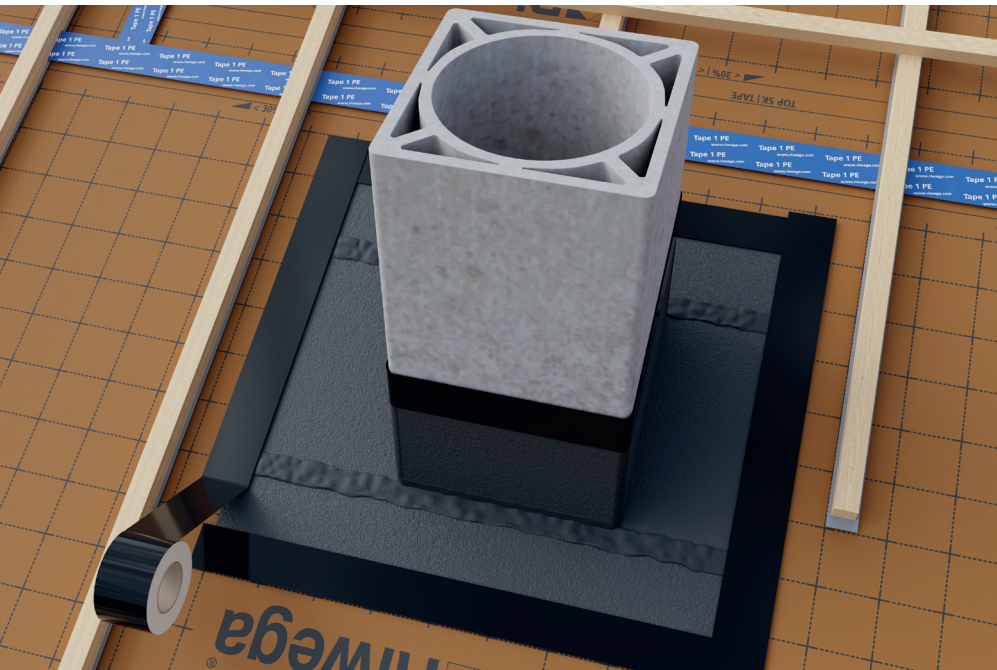

## QUICK OVERVIEW: STRENGTHS

### The first fire-certified tape

- Mono adhesive butyl tape
- Class B fire reaction certificate to meet the minimum standards of public buildings
- Particularly suitable for the sealing of USB Fire Zero and USB Vita
- Characterized by butyl glue with a high seal suitable for every laying surface

### Features:



### Classification:




### Technical data sheet

Glue		butyl
Glue carrier material		Alu / PET
Protection liner		YES
TVOC-test	ISO 16000-6	30 µg/m³
Thickness		0,6 mm
Sd value	UNI EN 1931	1632 m
Tensile strength MD/CD**	EN 12311-1	185 / 200 N/50mm
Elongation at break MD/CD**	EN 12311-1	10 / 20 %
Probe Tack	ASTM D 2979	7.0 N
180° Peel Adhesion	ASTM D 1000	27 N/cm
Solid content		100 %
Vapour passage resistance µ	EN 1931	2720000
Emissions	EMICODE®	EC1 <sup>PLUS</sup>
Working temperature		+0°C / +40°C
Temperature resistance		-30°C / +90°C
Fire class	EN 13501-1	B-s1, d0
UV stability		high*
Storage place		dry, protected from UV rays, ~20°C
Storage period		max. 12 months

\*with reference to the Central European climate

\*\*MD = longitudinal CD = transversal

Riwega Srl is not responsible for negligent and improper use of its products

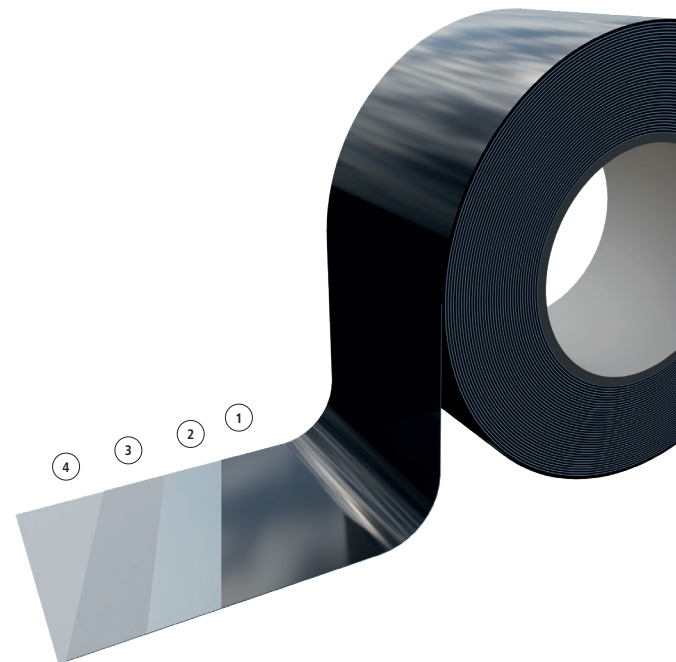

### Composition:

- PET film ①
- Aluminium film ②
- Butylic glue ③
- Silicone liner ④

### Codes and measures

Version	Code	Measures (mmxm)	Box (pc)	Pallet (box)
Coll Fire B 75	02044060	75x10	8	100